POWER YOUR FUTURE

Weichai Generator LG18WP

WP2.3D25E200

Prime Power: 18KW/22.5KVA

Standby Power: 19.8KW/24.75KVA



GENERATING POWER SOLUTIONS

Increased availability for new operations

Reliable, robust and versatile generator. Ready to deliver power for a next job.

Increased uptime during operations

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer transport and installation.

Reduced service & maintenance costs

Longer service intervals.

Quicker and more efficient service jobs.

Premium resale value

Designed and built to last.

ASAFETY

- Operate safely in accordance with proper operation manual.
- To prevent trouble and accidents perform daily and preventive maintenance checks without fail.

WEICHAI Series

20KVA--600KVA



FUAN LONGKAI POWER CO.,LTD.

Headquarters:

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian, China

Tel:+86-0593-6309773 Fax:+86-0593-6586988

E-mail: sales@longkaipower.com Web: www.longkaipower.com



Technical Data

Model		LG18WP
Rated prime power	kva	22.5
Rated standard power	kva	24.75
Rated voltage line to line	V	400/230
Rated current	Α	32.5
Maximun sound level	dB(@7m)	96

Engine-Weichai			
Model		WP2.3D25E200	
Aspiration	Air natural aspirated		
Fuel system	mechanical pump		
No. cylinders		4 in line	
Displacement	Liquid	2.3	
Bore*Stroke	mm	89*92	
Compression ratio		17.5:1	
Rated speed	r/min	1500	
Rated net power(with fan)	Kw	23	
Governor type		Electrical	
Start Motor	V	24	

Exhause System			
Exhause gas flow	litre/sec	104.9	
Exhause gas temp	${}^{\mathbb{C}}$	/	
Max back pressure	kPa	8	

Aspiration System			
Max inlet pressure	kPa	≤3.5	
Combustion volume	kPa	1	
Air flow	m³/min	100	

Fuel System		
100% load(Prime power)	L/h	4.7
75% load(Prime power)	L/h	/
50% load(Prime power)	L/h	/
Fuel tank capacity	L	135

Lubrication System		
Oil capacity	L	5.3
Oil consumption	g/kwh	0.4
Oil pressure	kPa	200-500
(continuous operation)		

Cooling System		
Coolant capacity	L	5
Thermostat operation range	$^{\circ}\!\mathbb{C}$	72-82
Max water temperature	$^{\circ}\!\mathbb{C}$	/

Alternator		
Model	LONGKAI	LK184E
	STAMFORD P	1144D-S0L2-M1
Phase		3
Voltage	V	400/230
Wiring Type	3 Pha	se 4 wire, Y type
Bearing		1
Power factor		8.0
Frequency	Hz	50
Prime power	KW	18
Exciter Type	Brushles	s, self-excitation
Voltage regulation	%	±0.5
Protection Grade		IP 23
Insulation grade		H/H
Altitude	m	≤1000

LG18WP

Controller-DEEPSEA

Model DSE6120MK3

Protective functions:

- Low oil pressure
- High water temperature
- High/low voltage
- High Engine Temperature and Overspeed.
- Voltage regulator frequency regulator
- Emergency stop
- Start failure



Control Module Options





- ■Auto generator control module
- ■Control module with" Three Remote Control" functions
- ■ATS auto load transfer screen
- ■Synchronising control modules
- ■Power output cabinet


Fuan Longkai Power Co., Ltd. | Web: www.longkaipower.com





Standard Features

otariaara i oataroo
Engine(WEICHAI GROUP)
Radiator 50°C max,fans are driven by bel
24V charge alternator
Alternator: single bearing alternator IP23,
insulation class H/H
Standard auto control system
One set of air filter, fuel filter, oil filter
Main line circuit breaker/MCCB
Base fuel tank
Two 24V batteries, rac and cable
Exhaust system(Ripple flex exhaust pipe,
exhaust siphon, flange, muffler
User manual •

Unit Dimensions(Basic unit)

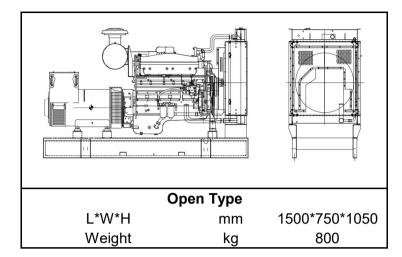

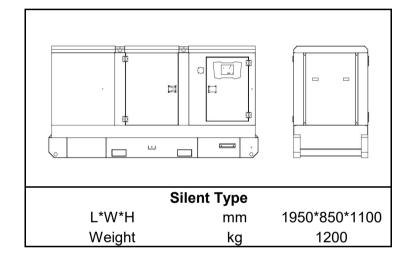

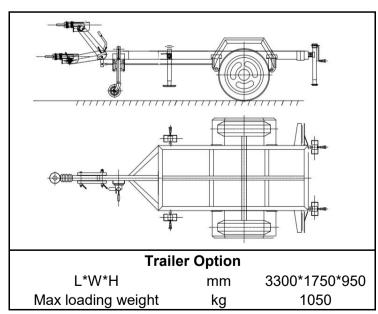

Options

Options		
Battery charge		\circ
Engine heater		\bigcirc
Alternator heater		\bigcirc
PMG		\bigcirc
Water oil separator		\bigcirc
Daily fuel tank		\bigcirc
Remote control panel		\bigcirc
Automatic transfer switch/AT	S	\bigcirc
Switch box		\bigcirc
Standard: ●	Options:o	

Warranty*

Weichai Engine

12 months from date of purchase and 1000 hours.

Generator

12 months from date of purchase or 1000 hours (whichever occurs first).

